

HARD CASES

MADE IN ITALY

www.explorercases.com

EN
26

BUILT STRONGER... TO LAST LONGER

The WIDEST range of WATERPROOF cases MADE IN ITALY



NATO CAGE CODE A 7423

WATERTIGHT · ULTRA LIGHT · INTERSTACKABLE · CORROSIONPROOF · TEMP RATING -33°C/+90°C · SAND & DUST PROOF · SHOCKPROOF · DESIGNED FOR MILITARY USE · AIRTIGHT · GUARANTEED PROTECTION

Explorer Cases first of their kind to be made in Italy by GT LINE, the European leader in technical cases manufacturing since 1970.
Our range of virtually indestructible waterproof cases provides a reliable solution for any equipment requiring a high level of protection. Applications range from Photo and Video equipment transportation to Medical, Aerospace and Defense applications where our cases, strong of their dustproof and waterproof qualities, offer absolute protection to its content making them ideal for use in the harshest environment.
All Explorer Cases are subjected to a rigorous series of controlled laboratory tests to grant their suitability for use in the most extreme and hazardous environments, all of them Certified according to IP67 Dustproof - Waterproof; Defence Standard 81-41 Level J; STANAG 4280 (edition 2); Conformity with the Directive 2002/95/EC - MIL-STD 810F/810G (depending on models).

Our products are manufactured in our state-of-the-art facilities under strict ISO 9001:2015 Quality Control System and with a particular attention to reduce the environmental performance impact of our production processes by carefully managing our environmental responsibilities in a systematic manner.



FEATURES:

1. REINFORCED CORNERS
2. SINGLE BLOCK O-RING SEAL
3. REMOVABLE LID (on certain models)
4. CORROSION PROOF METAL PINS
5. UNIQUE COPOLYMER PP INJECTION MOLDED BODY
6. SELF OILING WHEELS (on certain mod.)
7. ERGONOMICALLY DESIGNED HANDLE
8. PRESSURE RELEASE VALVE
9. CUSTOMIZABLE NAME TAG
**10. PRECUBED FOAM LAYERS
**11. CONVOLUTED FOAM IN THE LID
12. PADLOCK POINTS WITH METAL REINFORCEMENT (on certain models)
13. SECURE EASY TO OPEN LATCHES
14. POSITIVE STACKING LOCATION



*STANDARD COLORS



B BLACK · O ORANGE · G MIL. GREEN · D DESERT SAND · N BLUE · Y YELLOW



PRECUBED FOAM

Standard models available empty or with layers of precubed foam in the bottom and convoluted foam in the lid. Custom foams on demand.

HL SERIES

Introducing HEAVENLY LIGHT, the new standard for lightweight cases with no compromise on durability and reliability. Thanks to our innovative high performance patented plastic resin, HEAVENLY LIGHT featuring an improved strength and over 30% less weight.
Look for this logo to easily identify them among our many EXPLORER CASES models.

* Not all available on all models. Please refer to the summary table of each model
** Referred to all models equipped with precubed foam

OUR SUPERIOR FEATURES

- Made of exclusive patented formula Copolymer Polypropylene compound, to guarantee strongest performances
- Waterproof, resistant to chemicals, humidity, dust
- Resistant to harsh temperatures (-33°C / +90°C)
- Jam-free purge valve and latches
- Recommended for professional applications
- 100% made in Italy: Italian design and proven functionality
- First to achieve the new military standard qualifications
- Recognized as the most versatile case to customize
- Widest choice of accessories
- Incorporate a number of patented innovations
- All available empty or with “pick & pluck” foam layers



1908		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	190	125	85	20	65
	in	7 1/2	4 15/16	3 3/8	13/16	2 9/16
External dim.	mm	216	180	102		
	in	8 1/2	7 1/16	4		

Weight empty	kg 0,70	lbs 1.54
Weight w/foam	kg 0,80	lbs 1.76
Volume	lt 2,0	gal 0.52
Buoyancy	kg/max 1,4	lbs/max 3.08
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV1908

SUGGESTED OPTIONAL ACCESSORIES

1908	1913
DIV1908	DIV1913



1913		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	190	125	135	20	115
	in	7 1/2	4 15/16	5 5/16	13/16	4 1/2
External dim.	mm	216	180	152		
	in	8 1/2	7 1/16	6		

Weight empty	kg 0,85	lbs 1.87
Weight w/foam	kg 0,92	lbs 2.02
Volume	lt 3,2	gal 0.79
Buoyancy	kg/max 2,4	lbs/max5.29
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV1913





2209		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	95	20	75
	in	8 11/16	6 5/1 6	3 3/4	13/16	2 15/16
External dim.	mm	246	215	112		
	in	9 11/16	8 7/1 6	4 7/1 6		

Weight empty	kg 0,88	lbs 1.94
Weight w/foam	kg 0,99	lbs 2.18
Volume	lt 3,3	gal 0.79
Buoyancy	kg/max 2,3	lbs/max 5.07
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV2209

SUGGESTED OPTIONAL ACCESSORIES

2209	2214
DIV2209	DIV2214



2214		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	220	160	145	20	125
	in	8 11/16	6 5/16	5 11/16	13/16	4 15/16
External dim.	mm	246	215	162		
	in	9 11/16	8 7/16	6 3/8		

Weight empty	kg 1,16	lbs 2.56
Weight w/foam	kg 1,29	lbs 2.84
Volume	lt 5,1	gal 1.32
Buoyancy	kg/max 3,9	lbs/max 8.59
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate DIV2214

DEEPER SPACE
FOR EVERY MISSION



2437		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	240	240	370	70	300
	in	9 7/16	9 7/16	14 9/16	2 3/4	11 13/16
External dim.	mm	269	304	388		
	in	10 9/16	11 15/16	15 5/16		

Weight empty	kg 2.45	lbs 5.40
Weight w/foam	kg 2.87	lbs 6.33
Volume	lt 21.30	gal 5.63
Buoyancy	kg/max 15.60	lbs/max 34.39
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 3) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Extra-deep bottom
- Recessed soft-grip handle on the lid
- Automatic purge valve
- 2 patented jam-free pull-release latches
- Name tag holder
- 2 metal-reinforced padlockable points ø9 mm
- Optional shoulder strap available (Art. SHOULDERKIT.U)



2437.B E



2437.B

2437.O E

2437.O



2437.G E

2437.G

OUR FULL WARRANTY

"We want you to count on your Explorer as the most reliable case to carry your valuable equipment in the harshest environments. That's why we guarantee our cases against breakage of materials and defects on workmanship that could affect the integrity of what you carry inside.
After all, it is not by coincidence that all of our cases have met the most rigorous military standard qualifications and are used worldwide in extremely harsh and demanding environments."
** Warranty valid according to EU laws, only if the case has not been subjected to abuse, misuse, negligence or alteration. See full details on www.explorercases.com



Anti tilt support

2712		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	120	35	85
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8
External dim.	mm	305	270	144		
	in	12	10 5/8	5 11/16		

Weight empty	kg 1,62	lbs 3.57
Weight w/foam	kg 1,83	lbs 4.03
Volume	lt 6,6	gal 1.58
Buoyancy	kg/max 4,2	lbs/max 9.25
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-R, DIV2712 and PANEXPL27

SUGGESTED OPTIONAL ACCESSORIES		
2712	BAG-R	DIV2712
PANEXPL27		

SUGGESTED OPTIONAL ACCESSORIES		
2712HL	BAG-R	DIV2712
PANEXPL27HL		



Automatic purge valve

HL SERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

2712HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	120	35	85
	in	10 7/8	7 7/8	4 3/4	1 3/8	3 3/8
External dim.	mm	316	270	143		
	in	12 7/16	10 5/8	5 5/8		

Weight empty	kg 1,32	lbs 2.91
Weight w/foam	kg 1,46	lbs 3.21
Volume	lt 6,6	gal 1.74
Buoyancy	kg/max 4,2	lbs/max 9.25
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Anti tilt support
- Can accommodate BAG-R, DIV2712 and PANEXPL27HL
- Optional shoulder strap available (Art. SHOULDERKIT.U)

** Explorer Cases responsibility is limited to the case and not its content. Please contact us for more details on our warranty.



Anti tilt support

2717		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	170	35	135
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16
External dim.	mm	305	270	194		
	in	12	10 5/8	7 5/8		

Weight empty	kg 1,93	lbs 4.25
Weight w/foam	kg 2,12	lbs 4.67
Volume	lt 9,3	gal 2.37
Buoyancy	kg/max 6,7	lbs/max 14.77
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-S, DIV2717 and PANEXPL27

SUGGESTED OPTIONAL ACCESSORIES		
2717	BAG-S	DIV2717
PANEXPL27		

SUGGESTED OPTIONAL ACCESSORIES		
2717HL	BAG-S	DIV2717
PANEXPL27HL		



Automatic purge valve

HL SERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

2717HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	276	200	170	35	135
	in	10 7/8	7 7/8	6 11/16	1 3/8	5 5/16
External dim.	mm	316	270	192		
	in	12 7/16	10 5/8	7 9/16		

Weight empty	kg 1,54	lbs 3.39
Weight w/foam	kg 1,75	lbs 3.85
Volume	lt 9,4	gal 2.48
Buoyancy	kg/max 6,7	lbs/max 14.77
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Anti tilt support
- Can accommodate BAG-S, DIV2717 and PANEXPL27HL
- Optional shoulder strap available (Art. SHOULDERKIT.U)

LET'S RELY ON THE BEST PROTECTION



Can be stored in vertical position

HL SERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

3005		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	300	210	58	20	38
	in	11 13/16	8 1/4	2 5/16	13/16	1 1/2
External dim.	mm	326	269	75		
	in	12 13/16	10 9/16	2 15/16		
Weight empty	kg 1,10			lbs 2.42		
Weight w/foam	kg 1,20			lbs 2.64		
Volume	lt 4			gal 1.05		
Buoyancy	kg/max 2,10			lbs/max 4.62		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)



Anti tilt support



Art. SHOULDERKIT.U



Manual pressure release valve



3317		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	234	170	68	102
	in	13	9 3/16	6 11/16	2 11/16	4
External dim.	mm	360	304	194		
	in	14 3/16	11 15/16	7 5/8		
Weight empty	kg 2,29			lbs 5.04		
Weight w/foam	kg 2,51			lbs 5.53		
Volume	lt 13,1			gal 3.43		
Buoyancy	kg/max 7,0			lbs/max 15.43		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-T, DIV3317 and PANEXPL33



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES

3317	BAG-T	DIV3317
PANEXPL33		



HL SERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

3110HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	310	100	108	20	88
	in	12 3/16	3 15/16	4 1/4	13/16	3 7/16
External dim.	mm	336	159	127		
	in	13 1/4	6 1/4	5		
Weight empty	kg 0,95			lbs 2.09		
Weight w/foam	kg 1,05			lbs 2.31		
Volume	lt 3,4			gal 0.89		
Buoyancy	kg/max 2,5			lbs/max 5.51		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Anti tilt support



Manual pressure release valve



Automatic purge valve

HL SERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

3317HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	234	170	68	102
	in	13	9 3/16	6 11/16	2 11/16	4
External dim.	mm	360	304	192		
	in	14 3/16	11 15/16	7 9/16		
Weight empty	kg 1,78			lbs 3.92		
Weight w/foam	kg 2,02			lbs 4.45		
Volume	lt 13,1			gal 3.46		
Buoyancy	kg/max 7,1			lbs/max 15.65		
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)					

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Can accommodate BAG-T, DIV3317 and PANEXPL33HL
- Optional shoulder strap available (Art. SHOULDERKIT.U)



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES

3317HL	BAG-T	DIV3317
PANEXPL33HL		

*Pending certification release

TO EXPLORE THE WORLD AND BEYOND



3317W		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	330	350	170	68	102
	in	13	13 3/4	6 11/16	2 11/16	4
External dim.	mm	360	420	194		
	in	14 3/16	16 9/16	7 5/8		

Weight empty	kg 2,92	lbs 6.43
Weight w/foam	kg 3,30	lbs 7.27
Volume	lt 19,6	gal 5.17
Buoyancy	kg/max 10,6	lbs/max 23.36
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■						■					

- Lid can be set to slide-off
- Can accommodate BAG-U, DIV3317W and PANEXPL33W



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES

3317W	BAG-U	DIV3317W
PANEXPL33W		



3818		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	380	270	180	47	133
	in	14 15/16	10 5/8	7 1/16	1 3/4	5 5/16
External dim.	mm	410	340	205		
	in	16 1/8	13 3/8	8 1/16		

Weight empty	kg 3,14	lbs 6.92
Weight w/foam	kg 3,58	lbs 7.89
Volume	lt 18,4	gal 4.75
Buoyancy	kg/max 12,4	lbs/max 27.33
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■	■	■				■	■	■			

- Soft grip rubber handle
- Can accommodate BAG-E, DIV3818 and PANEXPL38



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES

3818	BAG-E	DIV3818
PANEXPL38		



HL SERIES — *HEAVENLY LIGHT*
- Improved strength
- Over 30% lighter

3815HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	380	270	155	47	108
	in	14 15/16	10 5/8	6 1/8	1 7/8	4 1/4
External dim.	mm	420	340	177		
	in	16 9/16	13 3/8	6 15/16		

Weight empty	kg 2,20	lbs 4.85
Weight w/foam	kg 2,53	lbs 5.57
Volume	lt 15,9	gal 4.2
Buoyancy	kg/max 10	lbs/max 22.04
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■	■	■	■	■	■	■	■	■	■	■	■

- Soft grip rubber handle
- Can accommodate PANEXPL38HL
- Optional shoulder strap available (Art. SHOULDERKIT.U)



Anti tilt support



Automatic purge valve

SUGGESTED OPTIONAL ACCESSORIES

3815HL
PANEXPL38HL



Automatic purge valve

HL SERIES — *HEAVENLY LIGHT*
- Improved strength
- Over 30% lighter

3818HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	380	270	180	47	133
	in	14 15/16	10 5/8	7 1/16	1 7/8	5 1/4
External dim.	mm	420	340	202		
	in	16 9/16	13 3/8	7 15/16		

Weight empty	kg 2,26	lbs 4.98
Weight w/foam	kg 2,66	lbs 5.86
Volume	lt 18,5	gal 4.88
Buoyancy	kg/max 12,3	lbs/max 27.11
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■	■	■	■	■	■	■	■	■	■	■	■

- Soft grip rubber handle
- Can accommodate BAG-E, DIV3818 and PANEXPL38HL
- Optional shoulder strap available (Art. SHOULDERKIT.U)



Anti tilt support

SUGGESTED OPTIONAL ACCESSORIES

3818HL	BAG-E	DIV3818
PANEXPL38HL		

MADE FOR THE HARSHEST CONDITIONS

EXPLORER CASES







HLSERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

3823HL		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	380	270	230	57	173
	in	14 15/16	10 5/8	9 1/16	2 1/4	6 13/16
External dim.	mm	420	340	252		
	in	16 9/16	13 3/8	9 15/16		

Weight empty	kg 2,59	lbs 5.71
Weight w/foam	kg 3,09	lbs 6.81
Volume	lt 23,6	gal 6.23
Buoyancy	kg/max 16	lbs/max 35.27
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Can accommodate PANEXPL38HL
- Optional shoulder strap available (Art. SHOULDERKIT.U)



Anti tilt support



Automatic purge valve

SUGGESTED OPTIONAL ACCESSORIES

3823HL

PANEXPL38HL





Automatic purge valve

4209HL.B C
includes:
- computer bag with shoulder strap (art. BAG-PC42)
- organized lid panel (art. PANEXPL42)

HLSERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

4209HL		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	420	300	95	35	60
	in	16 9/16	11 13/16	3 3/4	1 3/8	2 3/8
External dim.	mm	457	366	118		
	in	18	14 7/16	4 5/8		

Weight empty	kg 2,2	lbs 4.85
Weight w/foam	kg 2,6	lbs 5.73
Weight w/pc bag	kg 2,8	lbs 6.17
Volume	lt 12,0	gal 3.17
Buoyancy	kg/max 6,8	lbs/max 14.99
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												
Version	BC											
Laptop bag												

- New pull release latch grants additional safety, drop test proof
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Can accommodate BAG-PC42 and PANEXPL42
- Lid can be set to slide-off
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)

SUGGESTED OPTIONAL ACCESSORIES

4209HL-4216HL

PANEXPL42



BAG-PC42



HLSERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

4216HL		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	420	300	160	35	125
	in	16 9/16	11 13/16	6 5/16	1 3/8	4 15/16
External dim.	mm	457	366	183		
	in	18	14 7/16	7 3/16		

Weight empty	kg 2,6	lbs 5.73
Weight w/foam	kg 3,2	lbs 7.05
Volume	lt 20,6	gal 5.44
Buoyancy	kg/max 14,2	lbs/max 31.30
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Soft grip rubber handle
- New pull release latch grants additional safety, drop test proof
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-PC42 and PANEXPL42

BORN TO BE WILD



4412		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	125	47	78
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16
External dim.	mm	474	415	149		
	in	18 11/16	16 5/16	5 7/8		

Weight empty	kg 3,40	lbs 7.49
Weight w/foam	kg 3,90	lbs 8.59
Volume	lt 19,2	gal 5.01
Buoyancy	kg/max 10,7	lbs/max 23.58
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-PC44, DIV4412 and PANEXPL44

SUGGESTED OPTIONAL ACCESSORIES

4412	BAG-PC44	DIV4412
PANEXPL44		

SUGGESTED OPTIONAL ACCESSORIES

4412HL	BAG-PC44	DIV4412
PANEXPL44HL		



4412HL.B C and 4412HL.G C include:
- case mod. 4412HL.B E or 4412HL.G E
- computer bag (art. BAG-PC44)
- lid panel (art. PANEXPL44HL)
- shoulder strap (art. SHOULDERKIT.U)



4412HL.B C



4412HL.G C

HL SERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

4412HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	125	47	78
	in	17 1/2	13 9/16	4 15/16	1 7/8	3 1/16
External dim.	mm	485	414	149		
	in	19 1/8	16 5/16	5 7/8		

Weight empty	kg 2,50	lbs 5.51
Weight w/foam	kg 2.92	lbs 6.43
Weight w/pc bag	kg 3,22	lbs 7.09
Volume	lt 19,2	gal 5.07
Buoyancy	kg/max 10,8	lbs/max 23.80
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												
Version	BC		GC									
Laptop bag												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Soft grip rubber handle
- Anti tilt support
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-PC44, DIV4412 and PANEXPL44HL



Art. SHOULDERKIT.U

4419		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	190	47	143
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8
External dim.	mm	474	415	214		
	in	18 11/16	16 5/16	8 7/16		

Weight empty	kg 4,00	lbs 8.81
Weight w/foam	kg 4,70	lbs 10.36
Volume	lt 29,2	gal 7.66
Buoyancy	kg/max 19,7	lbs/max 43.43
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-A, DIV4419 and PANEXPL44

SUGGESTED OPTIONAL ACCESSORIES

4419	BAG-A	DIV4419
PANEXPL44		

SUGGESTED OPTIONAL ACCESSORIES

4419HL	BAG-A	DIV4419
PANEXPL44HL		



Anti tilt support

Automatic purge valve

HL SERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

4419HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	445	345	190	47	143
	in	17 1/2	13 9/16	7 1/2	1 7/8	5 5/8
External dim.	mm	485	414	212		
	in	19 1/8	16 5/16	8 3/8		

Weight empty	kg 2,91	lbs 6.41
Weight w/foam	kg 3,58	lbs 7.89
Volume	lt 29,2	gal 7.71
Buoyancy	kg/max 19,8	lbs/max 43.65
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Can accommodate BAG-A, DIV4419 and PANEXPL44HL

WHEELED HARD CASES



4820		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	480	370	205	50	155
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8
External dim.	mm	520	435	230		
	in	20 1/2	17 1/8	9 1/16		

Weight empty	kg 4,64	lbs 10.22
Weight w/foam	kg 5,40	lbs 11.90
Volume	lt 35,5	gal 9.24
Buoyancy	kg/max 24,7	lbs/max 54.45
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	
	MIL-STD 810G	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Can accommodate BAG-F, DIV4820 or BAG-PC48 and PANEXPL48

Art. BAG-PC48



SUGGESTED OPTIONAL ACCESSORIES

4820	BAG-F
PANEXPL48	
BAG-PC48	DIV4820



HLSERIES HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

4820HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	480	370	205	50	155
	in	18 7/8	14 9/16	8 1/16	1 15/16	6 1/8
External dim.	mm	520	440	230		
	in	20 1/2	17 5/16	9 1/16		

Weight empty	kg 3,41	lbs 7.51
Weight w/foam	kg 4,17	lbs 9.19
Volume	lt 36,4	gal 9.61
Buoyancy	kg/max 24,8	lbs/max 54.67
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810G	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Can accommodate BAG-F, DIV4820 or BAG-PC48 and PANEXPL48HL
- Optional shoulder strap available (Art. SHOULDERKIT.U)

SUGGESTED OPTIONAL ACCESSORIES

4820HL	BAG-F
PANEXPL48HL	
BAG-PC48	DIV4820



Robust telescopic handle

HLSERIES HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

4825HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	480	370	255	50	205
	in	18 7/8	14 9/16	10 1/16	1 15/16	8 1/16
External dim.	mm	520	440	276		
	in	20 1/2	17 5/16	10 7/8		

Weight empty	kg 4,5	lbs 9.92
Weight w/foam	kg 5,3	lbs 11.68
Volume	lt 39	gal 10.30
Buoyancy	kg/max 28,2	lbs/max 62.17
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J) MIL-STD 810G	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Soft grip rubber handle
- Stainless steel reinforced padlockable points
- Automatic purge valve
- Can accommodate BAG-F, DIV4820 or BAG-PC48 and PANEXPL48HL
- Wheels Ø78 cm



Wheels with bearings



Automatic purge valve

SUGGESTED OPTIONAL ACCESSORIES

4825HL	BAG-F
PANEXPL48HL	
BAG-PC48	DIV4820



Optional shipping label holder (Art. KIN.1224)



OUR CABIN CASES

TRAVEL LIGHT ON YOUR NEXT FLIGHT



5117		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	517	277	173	50	123
	in	20 3/8	10 7/8	6 13/16	1 15/16	4 13/16
External dim.	mm	546	347	197		
	in	21 1/2	13 11/16	7 3/4		

Weight empty	kg 3,80	lbs 8.37
Weight w/foam	kg 4,50	lbs 9.92
Volume	lt 24,7	gal 6.34
Buoyancy	kg/max 15,8	lbs/max 34.83
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Soft grip rubber handle
- Can accommodate BAG-B, DIV51 and PANEXPL51

SUGGESTED OPTIONAL ACCESSORIES

5117-5122	BAG-B	DIV51
PANEXPL51		



Retractable handle





5122		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	517	277	217	50	167
	in	20 3/8	10 7/8	8 9/16	1 15/16	6 9/16
External dim.	mm	546	347	247		
	in	21 1/2	13 11/16	9 3/4		

Weight empty	kg 6,00	lbs 13.22
Weight w/foam	kg 7,00	lbs 15.43
Volume	lt 31,0	gal 8.18
Buoyancy	kg/max 21,5	lbs/max 47.39
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Soft grip rubber handle and retractable handle
- Wheels with bearings Ø78 cm
- Can accommodate BAG-B, DIV51 and PANEXPL51



Easy to open release retractable handle



HL SERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

5212HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	520	285	125	30	95
	in	20 1/2	11 1/4	4 15/16	1 3/16	3 3/4
External dim.	mm	550	350	145		
	in	21 5/8	13 3/4	5 11/16		

Weight empty	kg 2,35	lbs 5.18
Weight w/foam	kg 2,85	lbs 6.28
Volume	lt 18,5	gal 4.88
Buoyancy	kg/max 12,7	lbs/max 27.99
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Soft grip rubber handle
- Automatic purge valve
- Pull release latches
- Stainless steel padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)

SUGGESTED OPTIONAL ACCESSORIES

5212HL-5215HL
PANEXPL52



HL SERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

5215HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	520	285	150	55	95
	in	20 1/2	11 1/4	5 7/8	2 3/16	3 3/4
External dim.	mm	550	350	170		
	in	21 5/8	13 3/4	6 11/16		

Weight empty	kg 2,55	lbs 5.62
Weight w/foam	kg 3,05	lbs 6.72
Volume	lt 22,2	gal 5.86
Buoyancy	kg/max 12,7	lbs/max 27.99
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
*Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Lid can be set to slide-off
- Soft grip rubber handle
- Automatic purge valve
- Pull release latches
- Stainless steel padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)

*Pending certification release



Optional shipping label holder (Art. KIN.1224)



BACKPACK CABIN
Adding backpack transportability to models 5218HL and 5221HL (more details on page 41)

HLSERIES — *HEAVENLY LIGHT*
- Improved strength
- Over 30% lighter

Complies with low-cost airlines' size restrictions
(always check with the pertinent airline)


5218HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	520	285	180	30	150
	in	20 1/2	11 1/4	7 1/16	1 3/16	5 7/8
External dim.	mm	550	350	200		
	in	21 5/8	13 3/4	7 7/8		

Weight empty	kg 3,75	lbs 8.26
Weight w/foam	kg 4,30	lbs 9.47
Volume	lt 26	gal 6.86
Buoyancy	kg/max 20	lbs/max 44.09
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

BOTH 5218HL & 5221HL MODELS
- Lid can be set to slide-off
- Soft grip rubber handle
- Automatic purge valve
- Self-oiling wheels Ø78 cm
- Pull release latches
- Retractable handle
- Stainless steel padlockable points
- Optional shipping label holder for both models (Art. KIN.1224)
- Can accommodate DIV52 and PANEXPL52

SUGGESTED OPTIONAL ACCESSORIES

5218HL-5221HL	DIV52
PANEXPL52	
	



HLSERIES — *HEAVENLY LIGHT*
- Improved strength
- Over 30% lighter

Complies with major airlines' size restrictions
(always check with the pertinent airline)

5221HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	520	285	205	55	150
	in	20 1/2	11 1/4	8 1/16	2 3/16	5 7/8
External dim.	mm	550	350	225		
	in	21 5/8	13 3/4	8 7/8		

Weight empty	kg 3,90	lbs 8.59
Weight w/foam	kg 4,50	lbs 9.92
Volume	lt 30,3	gal 8.00
Buoyancy	kg/max 20,0	lbs/max 44.09
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

5140
MODULAR SYSTEM



5140: THE SMART CASE

The Explorer mod. 5140 is the ideal scalable solution for transporting and protecting tools, parts and components, within a ruggedized waterproof trolley case, upgraded with the black reinforced telescopic trolley handle and silent wheels.
It's available in two main versions: to contain drawers or to contain complete boxes (organizers).
Many different internal configurations are possible, by combining the empty or foam filled drawers, or the boxes and the wide range of optional accessories. See full details on www.explorercases.com.
The Explorer mod. 5140 makes the ideal companion for the professionals of the maintenance, for the medical field, defense and aviation markets.

THIS PRODUCT IS POWERED BY INTELLIRESPOND.
The free App that allows for personal inventory and control of the content.
www.intellirespond.com


Telescopic handle


4 top lid latches


Padlockable points


Folding side handles




Art. WL02 Art. WL03 Art. WL01
Art. WL04 Art. WL05

Optional small translucid shockproof PP component boxes.


Removable top lid


Automatic valve


4 front door latches


4 silent self-oiling wheels Ø60 cm


Removable frontal lid


All drawers come out completely



Front lid can be opened up to 180°

EXPLORER CASES

PRESET MODELS

O-rings on upper and frontal lids, detachable top and frontal lid, removable tray, I.D. label and RFID/NFC tags.



5140.BKT01.AH
Foam filled drawers
INTERNAL DRAWERS CONFIGURATION
1x30H mm. drawer with bi-color pre-cubed foam
2x60H mm. drawers with bi-color pre-cubed foam
1x95H mm. drawer with bi-color pre-cubed foam



5140.BKT02.AH
Empty drawers
INTERNAL DRAWERS CONFIGURATION
1x30H mm. drawer empty
2x60H mm. drawers empty
1x95H mm. drawer empty



5140.BKT03.AH
Empty drawers
INTERNAL DRAWERS CONFIGURATION
4x30H mm. drawers empty
2x60H mm. drawers empty



5140.BKTE.AH
Empty case - AIDRAW ready
Side rails can fit a maximum of 8 AIDRAW in 10 different configurations (see on pages 21 and 22). Mixed configurations of empty and/or foam filled drawers can be available on demand.



5140.BE.AH
Completely empty



5140X.B
Empty case - AIBOX ready
Side rails can fit a maximum of 7 AIBOX in 8 different configurations (see on pages 21 and 22). Mixed configurations of empty and/or foam filled organizers available on demand.


Art. AIPANEL PLEXI
Optional transparent lid cover. Useful for foam inserts or readable instructions.


Art. AIWHEELS
4 Optional pivoting wheels, 2 equipped with brakes.

5140		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
External dim.	mm	581	381	455		
	in	22 7/8	15	17 15/16		
VERSIONS						
BKT01.AH	w/foam filled drawers			Weight	kg 13,80	lbs 30.42
BKT02.AH	w/empty drawers			Weight	kg 13,00	lbs 28.66
BKT03.AH	w/empty drawers			Weight	kg 13,80	lbs 30.42
BKTE.AH	AIDRAW ready			Weight	kg 9,75	lbs 21.49
BE.AH	completely empty			Weight	kg 7,52	lbs 16.57
X.B	AIBOX ready			Weight	kg 9,75	lbs 21.49
Temp. rating	°C min -33 max +90			°F min -27.4 max +194		
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (ev. J)					
Color						

OTHER CONFIGURATIONS

Check the table below to find your empty drawers model configuration (in yellow) or the one with precubed foam (in orange).

AIDRAW STANDARD CONFIGURATIONS TABLE					
					
MODEL	5140.B.8A	5140.B.6AL	5140.BKT03.AH	5140.B.2A3L	5140.B.4L
EMPTY	8 x AIDRAW3.E (H30 mm - 1.2 in)	6 x AIDRAW3.E (H30 mm - 1.2 in)	4 x AIDRAW3.E (H30 mm - 1.2 in)	2 x AIDRAW3.E (H30 mm - 1.2 in)	4 x AIDRAW6.E (H60 mm - 2.4 in)
		1 x AIDRAW6.E (H60 mm - 2.4 in)	2 x AIDRAW6.E (H60 mm - 2.4 in)	3 x AIDRAW6.E (H60 mm - 2.4 in)	
MODEL	5140.B.8C	5140.B.6CM	5140.B.4C2M	5140.B.2C3M	5140.B.4M
WITH FOAM	8 x AIDRAW3.F (H30 mm - 1.2 in)	6 x AIDRAW3.F (H30 mm - 1.2 in)	4 x AIDRAW3.F (H30 mm - 1.2 in)	2 x AIDRAW3.F (H30 mm - 1.2 in)	4 x AIDRAW6.F (H60 mm - 2.4 in)
		1 x AIDRAW6.F (H60 mm - 2.4 in)	2 x AIDRAW6.F (H60 mm - 2.4 in)	3 x AIDRAW6.F (H60 mm - 2.4 in)	
					
MODEL	5140.B.5AR	5140.B.2A2R	5140.B.L2R	5140.BKT02.AH	5140.B.3ALR
EMPTY	5 x AIDRAW3.E (H30 mm - 1.2 in)	2 x AIDRAW3.E (H30 mm - 1.2 in)	1 x AIDRAW6.E (H60 mm - 2.4 in)	1 x AIDRAW3.E (H30 mm - 1.2 in)	3 x AIDRAW3.E (H30 mm - 1.2 in)
	1 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW9.E (H95 mm - 3.7 in)	2 x AIDRAW6.E (H60 mm - 2.4 in)	1 x AIDRAW6.E (H60 mm - 2.4 in)
				1 x AIDRAW9.E (H95 mm - 3.7 in)	1 x AIDRAW9.E (H95 mm - 3.7 in)
MODEL	5140.B.5CS	5140.B.2C2S	5140.B.M2S	5140.BKT01.AH	5140.B.3CMS
WITH FOAM	5 x AIDRAW3.F (H30 mm - 1.2 in)	2 x AIDRAW3.F (H30 mm - 1.2 in)	1 x AIDRAW6.F (H60 mm - 2.4 in)	1 x AIDRAW3.F (H30 mm - 1.2 in)	3 x AIDRAW3.F (H30 mm - 1.2 in)
	1 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW9.F (H95 mm - 3.7 in)	2 x AIDRAW6.F (H60 mm - 2.4 in)	1 x AIDRAW6.F (H60 mm - 2.4 in)
				1 x AIDRAW9.F (H95 mm - 3.7 in)	1 x AIDRAW9.F (H95 mm - 3.7 in)

Check the table below to find your empty organizer model configuration (in yellow) or the one with precubed foam (in orange).


AIBOX STANDARD CONFIGURATIONS TABLE				
				
MODEL	5140X.B.7A	5140X.B.5AL	5140X.B.4AR	5140X.B.3A2L
EMPTY	7 x AIBOX3.E (H30 mm - 1.2 in)	5 x AIBOX3.E (H30 mm - 1.2 in)	4 x AIBOX3.E (H30 mm - 1.2 in)	3 x AIBOX3.E (H30 mm - 1.2 in)
		1 x AIBOX6.E (H60 mm - 2.4 in)	1 x AIBOX9.E (H95 mm - 3.7 in)	2 x AIBOX6.E (H60 mm - 2.4 in)
MODEL	5140X.B.7C	5140X.B.5CM	5140X.B.4CS	5140X.B.3C2M
WITH FOAM	7 x AIBOX3.F (H30 mm - 1.2 in)	5 x AIBOX3.F (H30 mm - 1.2 in)	4 x AIBOX3.F (H30 mm - 1.2 in)	3 x AIBOX3.F (H30 mm - 1.2 in)
		1 x AIBOX6.F (H60 mm - 2.4 in)	1 x AIBOX9.F (H95 mm - 3.7 in)	2 x AIBOX6.F (H60 mm - 2.4 in)
				
MODEL	5140X.B.2ALR	5140X.B.A3L	5140X.B.A2R	5140X.B.2LR
EMPTY	2 x AIBOX3.E (H30 mm - 1.2 in)	1 x AIBOX3.E (H30 mm - 1.2 in)	1 x AIBOX3.E (H30 mm - 1.2 in)	2 x AIBOX6.E (H60 mm - 2.4 in)
	1 x AIBOX6.E (H60 mm - 2.4 in)	3 x AIBOX6.E (H60 mm - 2.4 in)	2 x AIBOX9.E (H95 mm - 3.7 in)	1 x AIBOX9.E (H95 mm - 3.7 in)
	1 x AIBOX9.E (H95 mm - 3.7 in)			
MODEL	5140X.B.2CMS	5140X.B.C3M	5140X.B.C2S	5140X.B.2MS
WITH FOAM	2 x AIBOX3.F (H30 mm - 1.2 in)	1 x AIBOX3.F (H30 mm - 1.2 in)	1 x AIBOX3.F (H30 mm - 1.2 in)	2 x AIBOX6.F (H60 mm - 2.4 in)
	1 x AIBOX6.F (H60 mm - 2.4 in)	3 x AIBOX6.F (H60 mm - 2.4 in)	2 x AIBOX9.F (H95 mm - 3.7 in)	1 x AIBOX9.F (H95 mm - 3.7 in)
	1 x AIBOX9.F (H95 mm - 3.7 in)			

AIDRAW & AIBOX

Starting from the empty tool chest mod. 5140.BKTE.AH (p. 20) you can build your own internal assortment of drawers (AIDRAW), mixing empty and foam filled ones, respecting the possible combinations as shown on the chart below.
AIDRAW: Shock-proof PP drawers available in 3 different heights, 30, 60 and 95 mm. (1.2, 2.4, 3.7 in.) designed to contain all kinds of components and accessories. Available empty (.E) or with pre-cubed foam (.F).



EMPTY



PICK & PLUCK FOAM

3 DIFFERENT HEIGHTS

AIDRAW - TABLE				
DESCR.	#	ART.	INT. CONFIG.	INT. DIM. (mm)
DRAWER	A	AIDRAW3.E	EMPTY	467x255xH30
DRAWER	C	AIDRAW3.F	WITH FOAM	467x255xH30
DRAWER	L	AIDRAW6.E	EMPTY	467x255xH60
DRAWER	M	AIDRAW6.F	WITH FOAM	467x255xH60
DRAWER	R	AIDRAW9.E	EMPTY	467x255xH95
DRAWER	S	AIDRAW9.F	WITH FOAM	467x255xH95

Starting from the completely empty tool chest mod. 5140X.B (p. 20) you can build your own internal assortment of organizers (AIBOX), mixing empty and foam filled ones, respecting the possible combinations as shown on the chart below.
AIBOX: The ultimate modular solution for the storage, transport and use of sets of spare parts, components and tools. Available in 3 different heights, 30, 60 and 95 mm. (1.2, 2.4, 3.7 in.) they can be stacked positively and can stand in vertical position. The same footprint of both bottom and lid, grants a positive stacking even between organizers of different height. Available completely empty (.E) or with pre-cubed foam (.F).



Translucid fully detachable lid


AVAILABLE EMPTY OR WITH "PICK & PLUCK" FOAM LAYERS

3 DIFFERENT HEIGHTS


AIBOX - TABLE				
DESCR.	#	ART.	INT. CONFIG.	INT. DIM. (mm)
ORGANIZER	A	AIBOX3.E	EMPTY	467x255xH30
ORGANIZER	C	AIBOX3.F	WITH FOAM	467x255xH30
ORGANIZER	L	AIBOX6.E	EMPTY	467x255xH60
ORGANIZER	M	AIBOX6.F	WITH FOAM	467x255xH60
ORGANIZER	R	AIBOX9.E	EMPTY	467x255xH95
ORGANIZER	S	AIBOX9.F	WITH FOAM	467x255xH95

CUSTOMIZE YOUR 5140

AIDRAW CHART - 10 POSSIBLE CONFIGURATIONS - THEY FIT WITH 5140.BKTE.AH MODEL

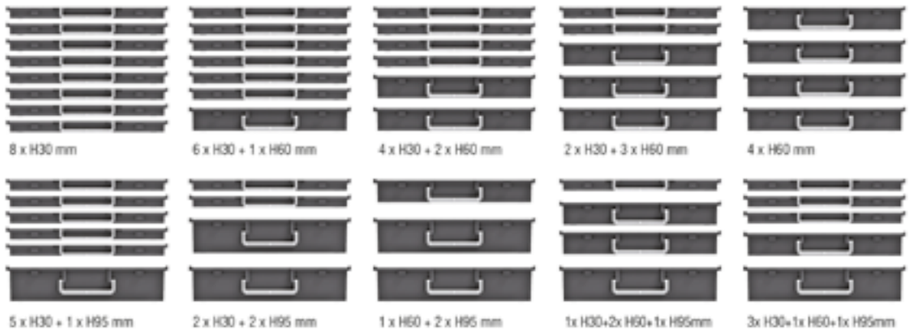

AIBOX CHART - 8 POSSIBLE CONFIGURATIONS - THEY FIT WITH 5140X.B MODEL

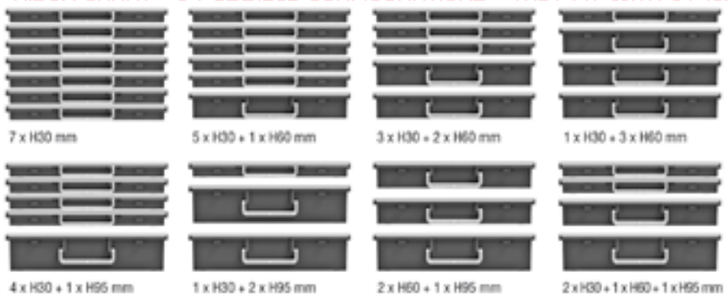

5140 MODULAR SYSTEM



You can now complement your 5140 tool chest with additional storage capacity, with these two new additional modules: 5116 and 5131.
Derived from the same reliability and durability that has made the 5140 worldwide famous, each of these new modules can be used independently as reliable tool-boxes for extra hand tools, power tools and large spare parts, or can be stacked together with the traditional 5140 tool chest, thus creating a professional and roomy trolley system.
The Patented easy “Lock-Unlock” system allows each module to be quickly stacked and released from each other, by using the practical one trigger release.
An upgraded lid 5140 LID is available to update your existing, previous generation 5140 tool-chest to the latest design that enables the stack-ability with these new practical modules.



5116.B



5140 LID



The new retrofit-compatible stackable 5140 LID allows all previous versions of the 5140 toolboxes to be connected with 5116 and 5131 modules, providing everybody with the benefits of the new modules’ functionality.

Int. Dim.: 516x296x50 mm - 20 5/16x11 5/8x1 15/16 in
Est. Dim.: 585x368x68 mm - 23 1/16x14 1/2x2 11/16 in



5131.B

5116		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	516	296	160	50	110
	in	20 5/16	11 5/8	6 5/16	1 15/16	4 5/16
External dim.	mm	585	368	198		
	in	23 1/16	14 1/2			

Weight empty	kg 3,3	lbs 7.27
Weight w/foam	kg 3,9	lbs 8.59
Volume	lt 24,4	gal 6.44
Buoyancy	kg/max 15,1	lbs/max 33.28

5131		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	516	296	310	60	250
	in	20 5/16	11 5/8	12 3/16	2 3/8	9 13/16
External dim.	mm	585	368	348		
	in	23 1/16	14 1/2	13 11/16		

Weight empty	kg 4,8	lbs 10.58
Weight w/foam	kg 6	lbs 13.22
Volume	lt 47,3	gal 12.49
Buoyancy	kg/max 34,4	lbs/max 75.83
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■						■					

EXPLORER CASES



5325		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	607	475	275		
	in	23 7/8	18 11/16	10 13/16		

Weight empty	kg 7	lbs 15.43
Weight w/foam	kg 8,25	lbs 18.18
Volume	lt 53	gal 14.00
Buoyancy	kg/max 37,2	lbs/max 82.01
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■						■					

- Lid can be set to slide-off
- Stainless steel reinforced padlockable points
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53



Two men lift side handles

SUGGESTED OPTIONAL ACCESSORIES

5325-5326	2x BAG-V
PANEXPL53	
2x DIV53	1x BAG-V + 1x DIV53



Easy to open release retractable handle

5326		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	538	405	250	60	190
	in	21 3/16	15 15/16	9 13/16	2 3/8	7 1/2
External dim.	mm	627	475	292		
	in	24 11/16	18 11/16	11 1/2		

Weight empty	kg 10	lbs 22.04
Weight w/foam	kg 11,25	lbs 24.80
Volume	lt 53	gal 14.00
Buoyancy	kg/max 37,2	lbs/max 82.01
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■						■					

- Lid can be set to slide-off
- Stainless steel padlockable points
- Two men lift side handles
- Self-oiling free running wheels Ø60 cm
- Soft grip rubber handle
- Can accommodate 2xBAG-V, 2xDIV53, 1xBAG-V+1xDIV53 and PANEXPL53



OUR CERTIFICATIONS



There are many different kinds of waterproof cases available on the market, but only a few can guarantee the superior features of excellence of Explorer Cases. As a matter of fact, Explorer Cases feature the highest number of patented innovations.

- IP67 Waterproof, dustproof
- Defence Standard 81-41 Level J
- STANAG 4280 (edition 2- 3)

Certificates available for download on www.explorercases.com

- Conformity with the Directive 2002/95/EC
- MIL-STD 810F/810G (depending on models)
- Nato Stock Number (NSN) on demand




5822		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	650	510	245		
	in	25 9/16	20 1/16	9 5/8		

Weight empty	kg 7,16	lbs 15.78
Weight w/foam	kg 8,39	lbs 18.49
Volume	lt 56,1	gal 14.79
Buoyancy	kg/max 36,7	lbs/max 80.90
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	
	MIL-STD 810F	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles
- Stainless steel reinforced padlockable points
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58

SUGGESTED OPTIONAL ACCESSORIES






5823		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	220	60	160
	in	22 13/16	17 5/16	8 11/16	2 3/8	6 5/16
External dim.	mm	670	510	262		
	in	26 3/8	20 1/16	10 5/16		

Weight empty	kg 9,17	lbs 20.21
Weight w/foam	kg 10,40	lbs 22.92
Volume	lt 56,1	gal 14.79
Buoyancy	kg/max 36,7	lbs/max 80.90
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles
- Stainless steel padlockable points
- Self-oiling free running wheels Ø60 cm
- Soft grip rubber handle
- Can accommodate 2xBAG-G, 2xDIV58, 1xBAG-G+1xDIV58 and PANEXPL58

SUGGESTED OPTIONAL ACCESSORIES






5833		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	580	440	330	60	270
	in	22 13/16	17 5/16	13	2 3/8	10 5/8
External dim.	mm	670	510	372		
	in	26 3/8	20 1/16	14 5/8		

Weight empty	kg 10,54	lbs 23.23
Weight w/foam	kg 12,65	lbs 27.88
Volume	lt 84,2	gal 22.19
Buoyancy	kg/max 62,0	lbs/max 136.68
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	
	MIL-STD 810F	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles
- Stainless steel padlockable points
- Self-oiling free running wheels Ø60 cm
- Soft grip rubber handle
- Can accommodate 1xDIV58.1+ 1xDIV58+1xDIV58.2, 2xDIV58+2xDIV58.2, 2xDIV58.1, 1xBAG-G+1xDIV58.2+1xDIV58.1, 2xBAG-G+2xDIV58.2, PANEXPL58

SUGGESTED OPTIONAL ACCESSORIES

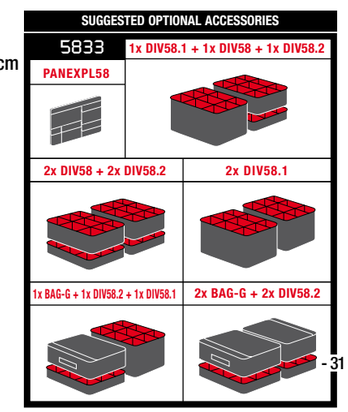

PROTECT YOUR DRONE. FLY WITH CONFIDENCE.





NEW

HLSERIES — *HEAVENLY LIGHT*
- Improved strength
- Over 30% lighter

6128HL		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	610	610	271	50	221
	in	24	24	10 11/16	1 15/16	8 11/16
External dim.	mm	680	696	293		
	in	26 3/4	27 9/16	11 5/16		

Weight empty	kg 10.00	lbs 22.05
Weight w/foam	kg 11.80	lbs 26.02
Volume	lt 100.00	gal 26.42
Buoyancy	kg/max 74.00	lbs/max 163.14
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
*Certifications	Certifications in progress	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- HRC — Patented highly resilient copolymer
- 2 large soft-grip side handles for two-person lifting
- 1 large soft-grip front handle
- Retractable trolley handle
- 2 large self-lubricating free-running wheels ø75 mm
- Automatic purge valve
- 6 large patented jam-free pull-release latches
- Name tag holder
- 6 padlockable points ø9 mm, two of which are metal-reinforced
- Shipping label holder









TO PROTECT YOUR MOST VALUABLE ITEMS





HL SERIES

HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

7626HL		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	763	399	260	50	210
	in	30 1/16	15 11/16	10 1/4	1 15/16	8 1/4
External dim.	mm	832	466	279		
	in	32 3/4	18 3/8	11		

Weight empty	kg 7,7	lbs	16.97
Weight w/foam	kg 9,5	lbs	20.94
Volume	lt 79,2	gal	20.92
Buoyancy	kg/max 57,5	lbs/max	126.76
Temp. rating	°C min -33 max +90	°F	min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)		

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Stainless steel reinforced padlockable points
- Large front handle

Automatic purge valve



Two men lift side handles



Wider pull release latches



Shipping label holder



Large self-oiling free running wheels Ø75 cm





7630		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	765	485	305	60	245
	in	30 1/8	19 1/8	12	2 3/8	9 5/8
External dim.	mm	860	560	355		
	in	33 7/8	22 1/16	14		

Weight empty	kg 13,56	lbs	29.89
Weight w/foam	kg 16,39	lbs	36.13
Volume	lt 113,1	gal	29.85
Buoyancy	kg/max 81,8	lbs/max	180.33
Temp. rating	°C min -33 max +90	°F	min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)		
	MIL-STD 810F - ATA 300		

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												


- Side handles and large front handle
- Stainless steel reinforced padlockable points
- Self-oiling free running wheels Ø60 cm
- Can accommodate 4xBAG-L, 2xBAG-M, 2xBAG-L+1xDIV7630, 2xDIV7630 or 2xBAG-L+1xDIV7630 and PANEXPL76



Two men lift side handles



SUGGESTED OPTIONAL ACCESSORIES

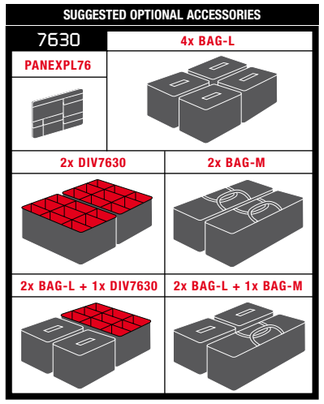







Retractable handle



HL SERIES

HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

7635HL		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	763	399	350	50	300
	in	30 1/16	15 11/16	13 3/4	1 15/16	11 13/16
External dim.	mm	832	466	369		
	in	32 3/4	18 3/8	14 1/2		

Weight empty	kg 9,4	lbs	20.72
Weight w/foam	kg 11,8	lbs	26.01
Volume	lt 106,6	gal	28.16
Buoyancy	kg/max 82,2	lbs/max	181.22
Temp. rating	°C min -33 max +90	°F	min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)		

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Stainless steel reinforced padlockable points
- Large front handle

Automatic purge valve



Two men lift side handles



Wider pull release latches



Shipping label holder



Large self-oiling free running wheels Ø75 cm

Explorer Cases are available in a wide selection of sizes, up to 6 colours and two main standard configurations available: empty or with “pick & pluck” foam layers. Special colours are available on request depending on quantity. The clean internal volume provides the ideal solution to create a custom foam fitting. In addition the cases are moulded with special “slots”, fixing points where a mechanical fixing with the case can be easily achieved by using the optional exclusive hardware.



7641		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	765	485	415	60	355
	in	30 1/8	19 1/8	16 5/16	2 3/8	14
External dim.	mm	860	560	460		
	in	33 7/8	22 1/16	18 1/8		


Weight empty	kg 15,02	lbs	33.11
Weight w/foam	kg 18,87	lbs	41.60
Volume	lt 153,9	gal	40.41
Buoyancy	kg/max 118,5	lbs/max	261.24
Temp. rating	°C min -33 max +90	°F	min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)		
	MIL-STD 810F		

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Wheels Ø60 cm and retractable handle
- Stainless steel reinforced padlockable points
- Can accommodate 4xBAG-0, 2xBAG-P, 2xBAG-0+1xBAG-P, 2xDIV7641, 2xBAG-0+1xDIV7641 and PANEXPL76

Two men lift side handles

SUGGESTED OPTIONAL ACCESSORIES

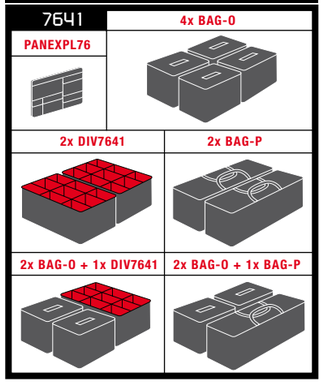

LIGHTWEIGHT ON THE GO



Automatic purge valve

HL SERIES
HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

7726		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	770	580	265	90	175
	in	30 5/16	22 13/16	10 7/16	3 9/16	6 7/8
External dim.	mm	836	641	304		
	in	32 15/16	25 1/4	11 15/16		

Weight empty	kg 10,30	lbs 22.70
Weight w/foam	kg 12,60	lbs 27.77
Volume	lt 118	gal 31.17
Buoyancy	kg/max 70	lbs/max 154.32
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Large front handle
- Side handles
- Self-oiling wheels Ø60 cm
- Stainless steel padlockable points
- Can accommodate 2xDIV77 and PANEXPL77

SUGGESTED OPTIONAL ACCESSORIES

7726	2x DIV77
PANEXPL77	



Automatic purge valve

HL SERIES
HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

7745		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	770	580	450	90	360
	in	30 5/16	22 13/16	17 11/16	3 9/16	14 3/16
External dim.	mm	836	641	489		
	in	32 15/16	25 1/4	19 1/4		

Weight empty	kg 15,50	lbs 34.17
Weight w/foam	kg 19,80	lbs 43.65
Volume	lt 200	gal 52.83
Buoyancy	kg/max 144	lbs/max 317.47
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Large front handle
- Side handles
- Self-oiling wheels Ø60 cm
- Stainless steel padlockable points
- Can accommodate 4xDIV77, 2xDIV7745, 1xDIV7745+2xDIV77 and PANEXPL77

SUGGESTED OPTIONAL ACCESSORIES

7745	4x DIV77
PANEXPL77	
2x DIV7745	1x DIV7745 + 2x DIV77

EXPLORER CASES







HL SERIES
HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

7814HL		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	780	350	145	42	103
	in	30 11/16	13 3/4	5 11/16	1 5/8	4 1/16
External dim.	mm	846	427	167		
	in	33 5/16	16 13/16	6 9/16		

Weight empty	kg 5,50	lbs 12.12
Weight w/foam	kg 6,40	lbs 14.10
Volume	lt 39,6	gal 10.46
Buoyancy	kg/max 25,3	lbs/max 55.77
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Optional shoulder strap available (Art. SHOULDERKIT.U)



Automatic purge valve



New pull release latch grants additional safety, drop test proof

SUPER TOUGH. ULTRA-LIGHT.



8830HL.B

HL SERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

8830HL		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	880	300	305	45	260
	in	34 10/16	11 13/16	12	1 3/4	10 3/16
External dim.	mm	949	368	329		
	in	37 3/8	14 3/16	12 15/16		

Weight empty	kg 6.90	lbs 15.21
Weight w/foam	kg 8.80	lbs 19.40
Volume	lt 80.52	gal 21.27
Buoyancy	kg/max 61.78	lbs/max 136.20
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
*Certifications	IP67, STANAG 4280 (ed 3), DEF STAN 8141 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- HRC — Patented highly resilient copolymer
- 2 soft-grip side handles
- 1 large soft-grip front handle
- Automatic purge valve
- 3 large patented jam-free pull-release latches
- Name tag holder
- 4 padlockable points ø9 mm, two of which are metal-reinforced
- Shipping label holder



8831HL.B

HL SERIES — HEAVENLY LIGHT
- Improved strength
- Over 30% lighter

8831HL		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	880	300	305	45	260
	in	34 10/16	11 13/16	12	1 3/4	10 3/16
External dim.	mm	963	368	329		
	in	37 7/16	14 3/16	12 15/16		

Weight empty	kg 7.80	lbs 17.19
Weight w/foam	kg 9.70	lbs 21.38
Volume	lt 80.52	gal 21.27
Buoyancy	kg/max 61.78	lbs/max 136.20
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
*Certifications	IP67, STANAG 4280 (ed 3), DEF STAN 8141 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- HRC — Patented highly resilient copolymer
- 2 soft-grip side handles
- 1 large soft-grip front handle
- Retractable trolley handle
- 2 large self-lubricating free-running wheels ø75 mm
- Automatic purge valve
- 3 large patented jam-free pull-release latches
- Name tag holder
- 4 padlockable points ø9 mm, two of which are metal-reinforced
- Shipping label holder




8830HL.O|O E



8831HL.O|O E

8830HL.G|G E

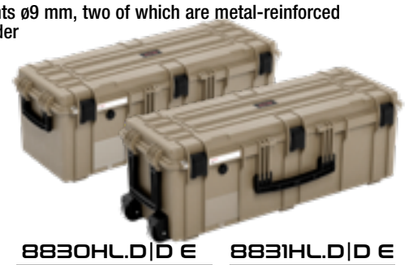

8831HL.G|G E

8830HL.D|D E

8831HL.D|D E

EXPLORER CASES



New pull release latches



Wheels with bearings

Automatic purge valve

9413		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	936	350	135	42	93
	in	36 7/8	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	987	414	158		
	in	3 11/16	16 5/16	6 1/4		

Weight empty	kg 6,70	lbs 14.77
Weight w/foam	kg 7,70	lbs 16.97
Volume	lt 45,3	gal 11.96
Buoyancy	kg/max 27,9	lbs/max 61.50
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- Optional shoulder strap available (Art. SHOULDERKIT.U)
- Wheels Ø60 cm



3-digits locks on demand (case code + DL)





Automatic purge valve

9433		L LENGTH	W WIDTH	D DEPTH	LID	BASE
Internal dim.	mm	936	350	330	42	288
	in	36 7/8	13 3/4	13	1 5/8	11 5/16
External dim.	mm	1009	412	354		
	in	39 3/4	16 1/4	13 15/16		

Weight empty	kg 10,20	lbs 22.48
Weight w/foam	kg 12,70	lbs 27.99
Volume	lt 108	gal 28.53
Buoyancy	kg/max 84,9	lbs/max 187.17
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles and large front handle
- Large self oiling free running wheels Ø75 cm



3-digits locks on demand (case code + DL)



New pull release latches and stainless steel padlockable points



Shipping label holder

ROOMY AND RUGGEDIZED







Plastic latches and stainless steel reinforced padlockable points



Optional 3-digits locks (case code + DL)



Two men lift side handles



Automatic purge valve



4 self-oiling free running wheels Ø60 cm



10826		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	260	60	200
	in	42 1/2	24 7/16	10 1/4	2 3/8	7 7/8
External dim.	mm	1178	725	287		
	in	46 3/8	28 1/4	11 5/16		

Weight empty	kg 17	lbs 37.47
Weight w/foam	kg 20,40	lbs 44.97
Weight w/multi weapons foam	kg 19,60	lbs 43.21
Volume	lt 174	gal 45.96
Buoyancy	kg/max 120,6	lbs/max 265.87
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■						■					





Optional 3-digits locks (case code + DL)



12 Heavy duty metal latches



4 self-oiling free running wheels Ø60 cm







Automatic purge valve



Art. PANDIV.10840 Optional.
To hold the lid foam content steady in place.
The kit includes:
- 1 alveolar polypropylene sheet
- 4 velcro straps
- 8 metal loops and fixing hardware

10840		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1080	620	400	200	200
	in	42 1/2	24 7/16	15 3/4	7 7/8	7 7/8
External dim.	mm	1178	718	427		
	in	46 3/8	28 1/4	16 13/16		


Weight empty	kg 19,80	lbs 43.65
Weight w/foam	kg 26,30	lbs 57.32
Weight w/multi weapons foam	kg 25,00	lbs 55.11
Volume	lt 260	gal 68.68
Buoyancy	kg/max 120,6	lbs/max 265.87
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color	■						■					

- Detachable lid for easier access
- Folding side handles on both shells
- Two men lift large folding side handles

XL WATERPROOF LONG CASES



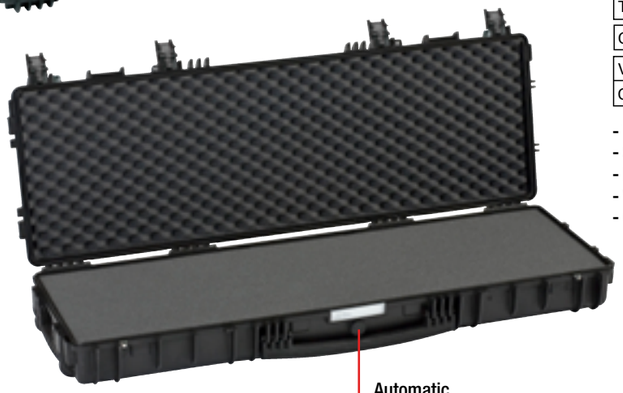

Automatic purge valve

11413		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1136	350	135	42	93
	in	44 3/4	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1189	415	159		
	in	46 13/16	16 5/16	6 1/4		

Weight empty	kg 7,80	lbs 17.19
Weight w/foam	kg 8,80	lbs 19.40
Volume	lt 53,7	gal 14.18
Buoyancy	kg/max 33,3	lbs/max73.41
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												


- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- New pull release latches
- Wheels with bearings Ø60 cm
- Optional shoulder strap available (Art. SHOULDERKIT.U)



3-digits locks on demand (case code + DL)





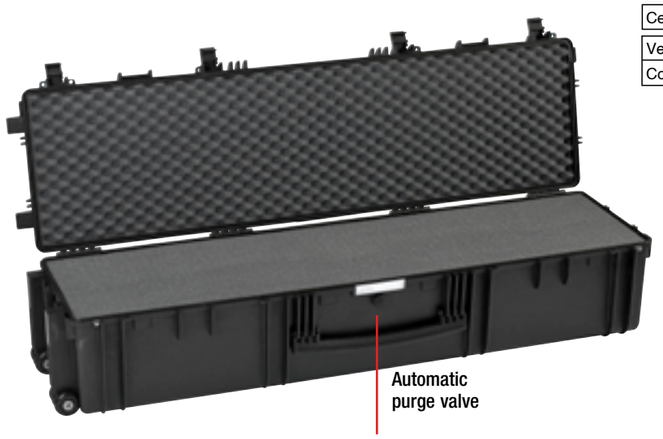

Automatic purge valve

13527		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1350	350	272	42	230
	in	53 1/8	13 3/4	10 11/16	1 5/8	9 1/16
External dim.	mm	1430	415	296		
	in	56 5/16	16 5/16	11 5/8		

Weight empty	kg 11,70	lbs 25.79
Weight w/foam	kg 14,90	lbs 32.84
Volume	lt 128,5	gal 33.94
Buoyancy	kg/max 97,5	lbs/max 214.95
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	


Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- 6 wheels with bearings Ø60 cm



3-digits locks on demand (case code + DL)



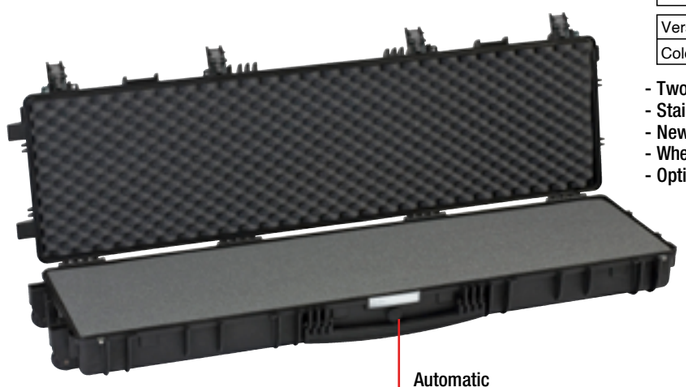

Automatic purge valve

13513		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1350	350	135	42	93
	in	53 1/8	13 3/4	5 5/16	1 5/8	3 11/16
External dim.	mm	1430	415	159		
	in	56 5/16	16 5/16	6 1/4		

Weight empty	kg 8,70	lbs 19.18
Weight w/foam	kg 9,95	lbs 21.93
Volume	lt 63,7	gal 16.82
Buoyancy	kg/max 39,5	lbs/max87.08
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- Two men lift side handles and large front handle
- Stainless steel reinforced padlockable points
- New pull release latches
- Wheels with bearings Ø60 cm
- Optional shoulder strap available (Art. SHOULDERKIT.U)



3-digits locks on demand (case code + DL)





HUGE CAPACITY. EXTRA - STRONG PROTECTION.



14242.B

14242		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1420	420	420	60	360
	in	55 15/16	16 1/2	16 1/2	2 3/8	14 3/16
External dim.	mm	1495	493	544		
	in	58 13/16	19 3/8	21 7/16		

Weight empty	kg 20.90	lbs 40.08
Weight w/foam	kg 26.40	lbs 58.20
Volume	lt 250.49	gal 66.17
Buoyancy	kg/max 193.26	lbs/max 426.06
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67, STANAG 4280 (ed 3), DEF STAN 8141 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- 2 large sturdy side handles for two-person lifting
- Automatic purge valve
- 6 large patented jam-free pull-release latches
- Name tag holder
- 4 padlockable points ø9 mm, two of which are metal-reinforced
- Large shipping documents holder
- Forklift-ready design





14242.0 E




14242.G E




14242.D E



14242.O

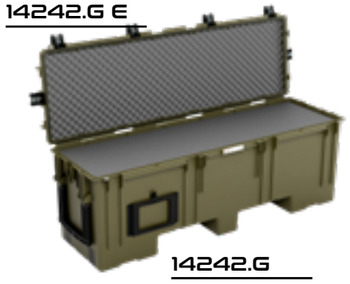

14242.G



14242.D



14243.B

14243		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1420	420	420	60	360
	in	55 15/16	16 1/2	16 1/2	2 3/8	14 3/16
External dim.	mm	1507	493	544		
	in	59 5/16	19 3/8	21 7/16		

Weight empty	kg 21.40	lbs 47.18
Weight w/foam	kg 26.90	lbs 59.30
Volume	lt 250.49	gal 66.17
Buoyancy	kg/max 193.26	lbs/max 426.06
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67, STANAG 4280 (ed 3), DEF STAN 8141 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- 2 large sturdy side handles for two-person lifting
- 2 large self-lubricating free-running wheels ø75 mm
- Automatic purge valve
- 6 large patented jam-free pull-release latches
- Name tag holder
- 4 padlockable points ø9 mm, two of which are metal-reinforced
- Large shipping documents holder
- Forklift-ready design







14243.0 E



14243.G E




14243.D E



14243.O



14243.G



14243.D

BUILT TO PERFORM.

NEW



14249.B

14249		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1420	420	488	60	428
	in	55 15/16	16 1/2	19 1/4	2 3/8	16 7/8
External dim.	mm	1507	493	544		
	in	59 5/16	19 3/8	21 7/16		

Weight empty	kg 21.30	lbs 46.96
Weight w/foam	kg 27.30	lbs 61.07
Volume	lt 292.24	gal 77.20
Buoyancy	kg/max 222.73	lbs/max 506.47
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67, STANAG 4280 (ed 3), DEF STAN 8141 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

- 2 large sturdy side handles for two-person lifting
- 2 large self-lubricating free-running wheels ø75 mm
- Automatic purge valve
- 6 large patented jam-free pull-release latches
- Name tag holder
- 4 padlockable points ø9 mm, two of which are metal-reinforced
- Large shipping documents holder
- Ultra-deep bottom





14249.O E



14249.G E



14249.D E



14249.O



14249.G



14249.D


EXPLORER CASES



15416		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	1540	377	160	42	118
	in	60 5/8	14 13/16	6 5/16	1 5/8	4 5/8
External dim.	mm	1629	456	183		
	in	64 1/8	17 15/16	7 3/16		

Weight empty	kg 11,30	lbs 24.91
Weight w/foam	kg 13,40	lbs 29.54
Volume	lt 92,9	gal 24.54
Buoyancy	kg/max 61,6	lbs/max 135.80
Temp. rating	°C min -33 max +90	°F min -27.4 max +194
Certifications	IP67 - STANAG 4280 (ed. 2) - DEF STAN 81-41 (lev. J)	

Version	B	O	G	D	N	Y	BE	OE	GE	DE	NE	YE
Color												

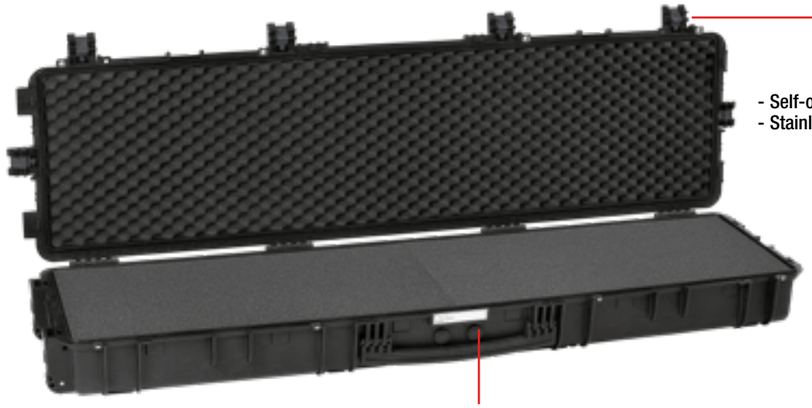

New wide pull release latches

- Self-oiling free running wheels Ø60 cm
- Stainless steel reinforced padlockable points



Two men lift side handles



3-digits locks on demand (case code + DL)



Double automatic purge valves



ACCESSORIES FOR PHOTO AND VIDEO PRO'S

PHOTO DIVIDERS

Modular dividers to protect and transport sensitive equipment.



DIV1908 (fits mod. 1908)
Ext. Dim. 185x120x65 mm.
7 5/16 x 4 3/4 x 2 9/16 in.



DIV1913 (fits mod. 1913)
Ext. Dim. 185x120x115 mm.
7 5/16 x 4 3/4 x 4 1/2 in.



DIV2209 (fits mod. 2209)
Ext. Dim. 215x155x75 mm.
8 7/16 x 6 1/8 x 2 15/16 in.



DIV2214 (fits mod. 2214)
Ext. Dim. 215x155x125 mm.
8 7/16 x 6 1/8 x 4 15/16 in.



DIV2712 (fits mod. 2712-2712HL)
Ext. Dim. 270x195x80 mm.
10 5/8 x 7 11/16 x 3 1/8 in.



DIV2717 (fits mod. 2717-2717HL)
Ext. Dim. 270x195x125 mm.
10 5/8 x 7 11/16 x 4 15/16 in.



DIV3317 (fits mod. 3317-3317HL)
Ext. Dim. 325x230x100 mm.
12 13/16 x 9 1/16 x 3 15/16 in.



DIV3317W (fits mod. 3317W)
Ext. Dim. 325x340x100 mm.
12 13/16 x 13 3/8 x 3 15/16 in.



DIV3818 (fits mod. 3818-3818HL)
Ext. Dim. 375x265x130 mm.
14 3/4 x 10 7/16 x 5 1/8 in.



DIV4412 (fits mod. 4412-4412HL)
Ext. Dim. 440x330x80 mm.
17 5/16 x 13 x 3 1/8 in.



DIV4419 (fits mod. 4419-4419HL)
Ext. Dim. 440x330x135 mm.
17 5/16 x 13 x 5 5/16 in.



DIV4820 (fits mod. 4820-4820HL-4825HL)
Ext. Dim. 475x365x145 mm.
18 11/16 x 14 3/8 x 5 11/16 in.



DIV51 (fits mod. 5117-5122)
Ext. Dim. 510x265x120 mm.
20 1/16 x 10 7/16 x 4 3/4 in.



DIV52 (fits mod. 5218HL-5221HL)
Ext. Dim. 515x275x120 mm.
20 1/4 x 10 13/16 x 4 3/4 in.



DIV53 (fits mod. 5325-5326)
Ext. Dim. 520x395x100 mm.
20 1/2 x 15 9/16 x 3 15/16 in.



DIV58 (fits mod. 5822-5823-5833)
Ext. Dim. 430x275x155 mm.
16 15/16 x 10 13/16 x 6 1/8 in.



DIV58.1 (fits mod. 5833)
Ext. Dim. 430x275x265 mm.
16 15/16 x 10 13/16 x 10 7/16 in.



DIV58.2 (fits mod. 5833)
Ext. Dim. 430x275x110 mm.
16 15/16 x 10 13/16 x 0 7/16 in.



DIV7630 (fits mod. 7630)
Ext. Dim. 470x375x240 mm.
18 1/2 x 14 3/4 x 9 7/16 in.



DIV7641 (fits mod. 7641)
Ext. Dim. 470x375x345 mm.
18 1/2 x 14 3/4 x 13 9/16 in.



DIV77 (fits mod. 7726)
Ext. Dim. 570x375x175 mm.
22 7/16 x 14 3/4 x 6 7/8 in.



DIV7745 (fits mod. 7745)
Ext. Dim. 580x370x345 mm.
22 13/16 x 14 9/16 x 13 9/16 in.



DRONE DIVIDER

DIVIDER FOR LARGER DRONES
Internal adjustable partitions

DRN77 (fits mod. 7745)
Ext. Dim. 740x570x350 mm.
29 1/8 x 22 7/16 x 13 3/4 in.
(COV77 included).



Elastic bands with Velcro to help fixing small equipment.
Always included with the dividers.

*Color of the interior fabric may be different.



COVERS FOR DIVIDERS

Top covers are available for larger models (on demand).

COV44 (fits mod. 4412-4412HL-4419-4419HL)
COV48-76 (fits mod. 4820-4820HL-7630-7641)
COV51 (fits mod. 5117-5122)
COV53 (fits mod. 5325-5326)
COV58 (fits mod. 5822-5823-5833)
COV77 (fits mod. 7726-7745)



PHOTO AND DRONE BACKPACKS



DRN44 (fits mod. 4419-4419HL)
Ext. Dim. 340x180x440 mm.
13 3/8 x 7 1/16 x 17 5/16 in.



DRN53 (fits mod. 5326)
Ext. Dim. 430x250x540 mm.
16 15/16 x 9 13/16 x 21 1/4 in.

+



=



<< DRONE BACKPACKS
Internal removable pouches for accessories



BPH44 (fits mod. 4419-4419HL)
Ext. Dim. 340x180x440 mm.
13 3/8 x 7 1/16 x 17 5/16 in.



BPH53 (fits mod. 5326)
Ext. Dim. 430x250x540 mm.
16 15/16 x 9 13/16 x 21 1/4 in.

>



<< PHOTO BACKPACKS
Internal adjustable dividers

*Color of the interior fabric may be different.



BACKPACK CABIN Available as an accessory

This practical kit adds backpack transportability to the models 5218HL and 5221HL. Generously and ergonomically padded for maximum comfort. Detachable lap belt. Quickly attachable and removable.



>>>



>>>



EXPLORER CASES



LID PANELS

Practical and robust lid panels with zippered pouches and velcro-ed compartments, ideal for stowing all kinds of accessories, cables and documents.



PANEXPL27
(fits mod. 2712-2717)
Dim. 255x180 mm.
10 1/16 x 7 1/16 in.



PANEXPL27HL
(fits mod. 2712HL-2717HL)
Dim. 255x178 mm.
10 1/16 x 7 in.



PANEXPL33
(fits mod. 3317)
Dim. 310x215 mm.
12 3/16 x 8 7/16 in.



PANEXPL33HL
(fits mod. 3317HL)
Dim. 295x184 mm.
11 5/8 x 7 1/4 in.



PANEXPL33W
(fits mod. 3317W)
Dim. 310x320 mm.
12 3/16 x 12 5/8 in.



PANEXPL38
(fits mod. 3818)
Dim. 375x225 mm.
14 3/4 x 8 7/8 in.



PANEXPL38HL
(fits mod. 3815HL-18HL-23HL)
Dim. 357x243 mm.
14 1/16 x 9 9/16 in.



PANEXPL42
(fits mod. 4209HL-4216HL)
Dim. 405x273 mm.
15 15/16 x 10 3/4 in.



PANEXPL44
(fits mod. 4412-4419)
Dim. 422x295 mm.
16 5/8 x 11 5/8 in.



PANEXPL44HL
(fits mod. 4412HL-4419HL)
Dim. 420x318 mm.
16 9/16 x 12 1/2 in.



PANEXPL48
(fits mod. 4820)
Dim. 475x325 mm.
18 1/16 x 12 13/16 in.



PANEXPL48HL
(fits mod. 4820HL-4825HL)
Dim. 458x341 mm.
18 1/16 x 13 7/16 in.



PANEXPL51
(fits mod. 5117-5122)
Dim. 500x230 mm.
19 /11/16 x 9 1/16 in.



PANEXPL52
(fits mod. 5212-15-18-21HL)
Dim. 505x270 mm.
19 7/8 x 10 5/8 in.



PANEXPL53
(fits mod. 5325-5326)
Dim. 525x390 mm.
20 11/16 x 15 3/8 in.



PANEXPL58
(fits mod. 5822-23-33)
Dim. 575x395 mm.
22 5/8 x 15 9/16 in.



PANEXPL76
(fits mod. 7630-7641)
Dim. 755x440 mm.
29 3/4 x 17 5/16 in.



PANEXPL77
(fits mod. 7726-7745)
Dim. 720x530 mm.
28 3/8 x 20 7/8 in.

AND PADDED BAGS

Highly durable padded bags with rubber coated handles and waterproof zipper with lockable velcro pull zippers. Practical external front pouch for documents, removable shoulder strap (on certain models) and rubber feet on the bottom to grant better grip. Internal adjustable padded dividers for flexible configurations. Ideal to protect sensitive equipment (ie electronic, photographic, broadcasting, medical etc.)



BAG-R (fits mod. 2712-2712HL)
Ext. Dim. 275x195x80 mm.
10 13/16 x 7 11/16 x 3 1/8 in.



BAG-S (fits mod. 2717-2717HL)
Ext. Dim. 275x195x135 mm.
10 13/16 x 7 11/16 x 5 5/16 in.



BAG-T (fits mod. 3317-3317HL)
Ext. Dim. 325x225x100 mm.
12 13/16 x 8 7/8 x 3 15/16 in.



BAG-U (fits mod. 3317W)
Ext. Dim. 330x350x95 mm.
13 x 13 3/4 x 3 3/4 in.



BAG-E (fits mod. 3818-3818HL)
Ext. Dim. 375x265x130 mm.
14 3/4 x 10 7/16 x 5 1/8 in.



BAG-PC42 (fits mod. 4209HL)
Ext. Dim. 425x315x65 mm.
16 3/4 x 12 3/8 x 2 9/16 in.




BAG-PC44 (fits mod. 4412-4412HL)
Ext. Dim. 455x345x85 mm.
17 15/16 x 13 9/16 x 3 3/8 in.



BAG-A (fits mod. 4419-4419HL)
Ext. Dim. 445x345x140 mm.
17 1/2 x 13 9/16 x 5 1/2 in.



BAG-F (fits mod. 4820-4820HL-4825HL)
Ext. Dim. 480x370x150 mm.
18 7/8 x 14 9/16 x 5 7/8 in.



BAG-PC48 (fits mod. 4820-4820HL-4825HL)
Ext. Dim. 480x355x165 mm.
18 7/8 x 14 x 6 1/2 in.



BAG-B (fits mod. 5117-5122)
Ext. Dim. 520x275x110 mm.
20 1/2 x 10 13/16 x 4 5/16 in.



BAG-V (fits mod. 5325-5326)
Ext. Dim. 535x400x90 mm.
21 1/16 x 15 3/4 x 3 9/16 in.



BAG-G (fits mod. 5822-5823-5833)
Ext. Dim. 430x285x160 mm.
16 15/16 x 11 1/4 x 6 5/16 in.



BAG-L (fits mod. 7630)
Ext. Dim. 385x250x240 mm.
15 3/16 x 9 13/16 x 9 7/16 in.



BAG-M (fits mod. 7630)
Ext. Dim. 755x240x250 mm.
29 3/4 x 9 7/16 x 9 13/16 in.



BAG-O (fits mod. 7641)
Ext. Dim. 385x2402x360 mm.
15 3/16 x 9 7/16 x 14 3/16 in.



BAG-P (fits mod. 7641)
Ext. Dim. 755x240x360 mm.
29 3/4 x 9 7/16 x 14 3/16 in.



Elastic bands with Velcro to help fixing small equipment.
Always included with the bags.

*Color of the interior fabric may be different.

WIDE RANGE OF CUSTOM OPTIONS

TRIPOD BAG90

Padded tripod bag in tear resistant fabric. Adjustable shoulder strap and frontal pouch for accessories. Ideal to protect and transport professional tripods for cameras and video cameras.



Ext. Dim. 900x170 max/140 min x 100 mm.
35 7/16x6 11/16 max/5 1/2 min x 3 5/16 in.



TRIPODISC

Patented, smart accessory that allows to attach a small or midsize EXPLORERCASE to a standard 1/4" thread tripod.
The assembly is very easy: just follow the provided instruction, make a hole in the bottom of the case and secure together the two metal discs; the watertight feature remains granted by the discs O-ring.



Developed for any activity where a case needs to be standing at a higher position: laptop computer, drones, audio-video equipment.





TOP ENVELOPE 15

Protective sleeve for PC 15"-15.6"

Ext. Dim. 400x270x30 mm.
15 3/4 x 10 5/8 x 1 3/16 in.



A CASE YOU CAN WEAR

The most innovative backpack carrying system for waterproof cases. A simple concept to quickly turn a case into a backpack. It allows to protect sensitive equipment and at the same time to get all the convenience of a hands-free backpack. Available in 2 sizes.


BACKPACK M FITS MOD. 3317, 3317HL, 3815HL, 3818, 3818HL, 3823HL, 4209HL, 5117.

BACKPACK L FITS MOD. 3317W, 4216HL, 4412, 4412HL, 4419, 4419HL, 4820, 4820HL, 5122, 5218HL, 5221HL.




MOUNTING BRACKETS


Our flexible manufacturing process allows us to easily and efficiently make your OEM case developping specific interiors to meet your requirements.




Art. KIT SUPP.PLAST (6 pcs.)



Art. KIT SUPP.EXPL (6 pcs.)

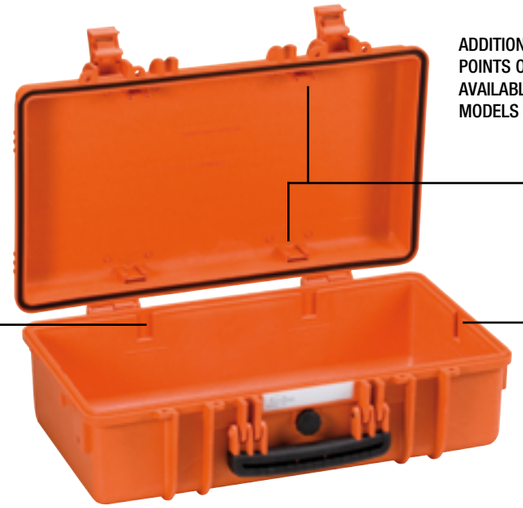

ADDITIONAL FIXING POINTS ON THE LID AVAILABLE ON CERTAIN MODELS





Art. KIT.EXPL.PLUGS (6 pcs.)

ALL MODELS (EXCEPT FOR THE 1908) ARE INTERNALLY EQUIPPED WITH SPECIFIC SLOTS, TO APPLY THE OPTIONAL METAL OR PLASTIC BRACKETS WHICH PROVIDE EITHER A PANEL'S FIXING POINTS OR A FIX MECHANICAL JOINT INSIDE THE CASE, TO BUILD MORE COMPLETE APPLICATIONS. THIS WAY THE CASE BECOMES A REAL WORKSTATION, RATHER THAN JUST A CARRYING CONTAINER.
AS THE PANEL MOUNTING BRACKETS ARE MECHANICALLY FIXED BY SCREWS, THEY CAN BE REMOVED WHEN NECESSARY.
THE DEDICATED SCREWS ALLOW THE CASE TO REMAIN WATERPROOF, AND HELP THE PANELS TO BE REMOVED EASILY AND QUICKLY.

THE SLOTS CAN BE CLOSED BY SPECIAL PLASTIC BLIND INSERTS THAT WILL GIVE THE CASE A BETTER AND FINISHED INTERIOR LOOK.

PANEL FRAMES

USER FRIENDLY PANEL FRAMES, THEY CAN BE USED TO FIX SEVERAL KIND OF PANELS, FROM PLASTIC TO ALUMINUM ONES.

EQUIPPED WITH AN ADDITIONAL GASKET, THEY CAN PROVIDE THE CASE WITH A PERFECT INSTRUMENTATION SURFACE AND A FURTHER HUMIDITY AND DUST RESISTANCE WHEN THE CASE IS USED IN THE FIELD. COMPLETELY REMOVABLE, RESISTANT AND LIGHT, THESE PANEL RINGS HELP TO TRANSFORM THE EXPLORER CASES INTO PRACTICAL WORKSTATIONS.





Art. PANRING27, PANRING27.USA, PANRING33, PANRING33.USA, PANRING38, PANRING38.USA, PANRING38HL, PANRING38HL.USA, PANRING42, PANRING42.USA, PANRING44, PANRING44.USA, PANRING44HL, PANRING44HL.USA, PANRING48, PANRING48.USA, PANRING48HL, PANRING48HL.USA, PANRING51, PANRING51.USA, PANRING52, PANRING52.USA.

PADLOCKS

PATENTED PADLOCKS DESIGNED TO FIT SNUG TO THE EXPLORER CASES SHAPE SO AS NOT TO SWING OUT.



PATENTED HEAVY DUTY BRASS PADLOCK
(Art. EXPL PADLOCK)



PATENTED COMBINATION PADLOCK
(Art. EXPL COMBILOCK)



TSA LOCK™ COMBI PADLOCK
(Art. EXPL TSA.DIGILOCK)

TSA LOCK™ PADLOCKS ALLOW AIRPORT SECURITY AGENTS TO OPEN THE CASE WITHOUT DESTROYING THE LOCK.

TRAVEL SENTRY

KIN.1490 >>>
Optional 50 mm key latch for Explorer Cases (please enquire)



OEM SOLUTIONS OTHER CONTAINERS

Our cases can be molded in any color* of your choice or with special copolymer complying with Fire-resistance ratings, ESD, and other specifications.
Based on our extensive knowledge in the packaging and protection of delicate instruments, we are able to create the most suitable and cost-effective solutions for your requirements.
Do not hesitate to get in touch with us for any technical or commercial query.





Custom foam possible for all sizes



Custom printings available



Panel mounting available



Customization for special application



Special labelling on demand



We can bring to life your special case requirement



Art. KIT TRAY MUB
Optional tray with removable divider for tools, instruments or spare parts.
MUB78 can fit up to two trays.
Elasticated bands for the tray also available (Art. KIT03).

WATER RESISTANT

MUB78		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	780	410	330	50	280
	in	30 11/16	16 1/8	13	1 15/16	11
External dim.	mm	807	470	345		
	in	31 3/4	18 1/2	13 9/16		

Weight empty	kg 6,30	lbs 13.88
Volume	lt 89	gal 23.51
Buoyancy	kg/max 80,5	lbs/max 177.47

Versions	MUB78	MUB78.G E	MUB78.D E			
Color						

- Empty
- Lightweight
- Moulded high impact polypropylene
- Integral lifting points on both ends
- Full length steel hinge pin to lid
- Use in high/low temp environments
- Slide out ID nameplate holder
- Large fold flat carry handle
- Padlocking provision
- Stacking location points



MUB65		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	653	340	312	65	247
	in	25 11/16	13 3/8	12 5/16	2 9/16	9 3/4
External dim.	mm	678	404	331		
	in	26 11/16	15 7/8	13 1/16		

Weight empty	kg 4,40	lbs 9.70
Volume	lt 61,5	gal 16.24
Buoyancy	kg/max 42,7	lbs/max 94.13

Versions	MUB65					
Color						

- Empty
- Lightweight
- Moulded high impact polypropylene
- Integral lifting points on both ends
- Full length steel hinge pin to lid
- Use in high/low temp environments
- Slide out ID nameplate holder
- Large front handle
- Padlocking provision
- Stacking location points





Free running wheels

WATER RESISTANT

GUNCASE		L	W	D		
		LENGTH	WIDTH	DEPTH	LID	BASE
Internal dim.	mm	925	420	120	60	60
	in	36 7/16	16 9/16	4 3/4	2 3/8	2 3/8
External dim.	mm	1078	475	157		
	in	42 7/16	18 11/16	6 3/16		

Weight empty	kg 7,1	lbs 15.65
Weight w/foam	kg 8,1	lbs 17.85
Volume	lt 46,6	gal 12.31

Versions	GUNCASE.B	GUNCASE.BE	GUNCASE.B CV
Color			

- 4 easy action quick release “up&over” latches (2 with combi locks)
- Manual pressure release valve




Strong metal carry handle

GUNCASE.B CV

TECHNICAL SPECIFICATIONS

CASE MODEL	COLORS BLACK	ORANGE	M.GREEN	D.SAND	BLUE N.	YELLOW	REMOV. LID	WHEELS Ø cm	SHOULDER STRAP OPT.	INTERNAL CONFIG.	WEIGHT KG	BUOYANCY KG MAX *	VOLUME LITRES	INT. DIM. (mm) L	W	D	LID	BASE	EXT. DIM. (mm) L	W	D
1908	BE	OE	GE							EMPTY	0,7	1,4	2	190	125	85	20	65	216	180	102
	B	O	G							W/FOAM	0,8										
1913	BE	OE	GE							EMPTY	0,85	2,4	3,2	190	125	135	20	115	216	180	152
	B	O	G							W/FOAM	0,92										
2209	BE	OE	GE							EMPTY	0,88	2,3	3,3	220	160	95	20	75	246	215	112
	B	O	G							W/FOAM	0,99										
2214	BE	OE	GE							EMPTY	1,16	3,9	5,1	220	160	145	20	125	246	215	162
	B	O	G							W/FOAM	1,29										
2437	BE	OE	GE						✓	EMPTY	2,45	15,6	21,3	240	240	370	70	300	269	304	388
	B	O	G							W/FOAM	2,87										
2712	BE	OE	GE				✓			EMPTY	1,62	4,2	6,6	276	200	120	35	85	305	270	144
	B	O	G							W/FOAM	1,83										
2712HL	BE	OE	GE	DE	NE	YE	✓		✓	EMPTY	1,32	4,2	6,6	276	200	120	35	85	316	270	143
	B	O	G	D	N	Y				W/FOAM	1,46										
2717	BE	OE	GE				✓			EMPTY	1,93	6,7	9,3	276	200	170	35	135	305	270	194
	B	O	G							W/FOAM	2,12										
2717HL	BE	OE	GE	DE	NE	YE	✓		✓	EMPTY	1,54	6,7	9,4	276	200	170	35	135	316	270	192
	B	O	G	D	N	Y				W/FOAM	1,75										
3005	BE	OE	GE	DE						EMPTY	1,1	2,1	4	300	210	58	20	38	326	269	75
	B	O	G	D						W/FOAM	1,2										
3317	BE	OE	GE				✓			EMPTY	2,29	7	13,1	330	234	170	68	102	360	304	194
	B	O	G							W/FOAM	2,51										
3317HL	BE	OE	GE	DE	NE	YE	✓		✓	EMPTY	1,78	7,1	13,1	330	234	170	68	102	360	304	192
	B	O	G	D	N	Y				W/FOAM	2,02										
3317W	BE						✓			EMPTY	2,92	10,6	19,6	330	350	170	68	102	360	420	194
	B									W/FOAM	3,3										
3815HL	BE	OE	GE	DE	NE	YE	✓		✓	EMPTY	2,2	10	15,9	380	270	155	47	108	420	340	177
	B	O	G	D	N	Y				W/FOAM	2,53										
3818	BE	OE	GE							EMPTY	3,14	12,4	18,4	380	270	180	47	133	410	340	205
	B	O	G							W/FOAM	3,58										
3818HL	BE	OE	GE	DE	NE	YE	✓		✓	EMPTY	2,26	12,3	18,5	380	270	180	47	133	420	340	202
	B	O	G	D	N	Y				W/FOAM	2,66										
3823HL	BE	OE	GE	DE	NE	YE	✓		✓	EMPTY	2,59	16	23,6	380	270	230	57	173	420	340	252
	B	O	G	D	N	Y				W/FOAM	3,09										
4209HL	BE	OE	GE	DE			✓		✓	EMPTY	2,2	6,8	12	420	300	95	35	60	457	366	118
	B	O	G	D						W/FOAM	2,6										
	BC									W/PC BAG	2,8										
4216HL	BE	OE	GE	DE			✓			EMPTY	2,6	14,2	20,6	420	300	160	35	125	457	366	183
	B	O	G	D						W/FOAM	3,2										
4412	BE	OE	GE				✓			EMPTY	3,4	10,7	19,2	445	345	125	47	78	474	415	149
	B	O	G							W/FOAM	3,9										
4412HL	BE	OE	GE	DE	NE	YE	✓			EMPTY	2,5	10,8	19,2	445	345	125	47	78	485	414	149
	B	O	G	D	N	Y				W/FOAM	2,92										
	BC		GC							W/PC BAG	3,22										
4419	BE	OE	GE				✓			EMPTY	4	19,7	29,2	445	345	190	47	143	474	415	214
	B	O	G							W/FOAM	4,7										
4419HL	BE	OE	GE	DE	NE	YE	✓			EMPTY	2,91	19,8	29,2	445	345	190	47	143	485	414	212
	B	O	G	D	N	Y				W/FOAM	3,58										
4820	BE	OE	GE							EMPTY	4,64	24,7	35,5	480	370	205	50	155	520	435	230
	B	O	G							W/FOAM	5,4										
4820HL	BE	OE	GE	DE	NE	YE			✓	EMPTY	3,41	24,8	36,4	480	370	205	50	155	520	440	230
	B	O	G	D	N	Y				W/FOAM	4,17										
4825HL	BE	OE	GE	DE	NE	YE		78		EMPTY	4,5	28,2	39	480	370	255	50	205	520	440	276
	B	O	G	D	N	Y				W/FOAM	5,3										
5117	BE	OE	GE				✓			EMPTY	3,8	15,8	24,7	517	277	173	50	123	546	347	197
	B	O	G							W/FOAM	4,5										
5122	BE	OE	GE				✓	78		EMPTY	6	21,5	31	517	277	217	50	167	546	347	247
	B	O	G							W/FOAM	7										

CASE MODEL	COLORS BLACK	ORANGE	M.GREEN	D.SAND	BLUE N.	YELLOW	REMOV. LID	WHEELS Ø cm	SHOULDER STRAP OPT.	INTERNAL CONFIG.	WEIGHT KG	BUOYANCY KG MAX *	VOLUME LITRES	INT. DIM. (mm) L	W	D	LID	BASE	EXT. DIM. (mm) L	W	D
5140	BKT01.AH						✓	60		W/FOAM FILLED DRAWERS	13								581	381	455
	BKT02.AH									W/EMPTY DRAWERS	13,8										
	BKT03.AH									W/EMPTY DRAWERS	13,8										
	BKTE.AH									AIDRAW READY	9,75										
	BE.AH									COMPLETELY EMPTY	7,52										
	X.B									AIBOX READY	9,75										
5218HL	BE		GE	DE			✓	78		EMPTY	3,75	20	26	520	285	180	30	150	550	350	200
	B		G	D						W/FOAM	4,3										
5221HL	BE		GE	DE			✓	78		EMPTY	3,9	20	30,3	520	285	205	55	150	550	350	225
	B		G	D						W/FOAM	4,5										
5325	BE	OE	GE				✓			EMPTY	7	37,2	53	538	405	250	60	190	607	475	275
	B	O	G							W/FOAM	8,25										
5326	BE	OE	GE				✓	60		EMPTY	10	37,2	53	538	405	250	60	190	627	475	292
	B	O	G							W/FOAM	11,25										
5822	BE	OE	GE							EMPTY	7,16	36,7	56,1	580	440	220	60	160	650	510	245
	B	O	G							W/FOAM	8,39										
5823	BE	OE	GE					60		EMPTY	9,17	36,7	56,1	580	440	220	60	160	670	510	262
	B	O	G							W/FOAM	10,4										
5833	BE	OE	GE					60		EMPTY	10,54	62	84,2	580	440	330	60	270	670	510	372
	B	O	G							W/FOAM	12,65										
6128HL	BE	OE	GE	DE				75		EMPTY	10	74	100	610	610	271	50	221	680	696	293
	B	O	G	D						W/FOAM	11,8										
7626HL	BE	OE	GE	DE				75		EMPTY	7,7	57,5	79,2	763	399	260	50	210	832	466	279
	B	O	G	D						W/FOAM	9,5										
7630	BE	OE	GE					60		EMPTY	13,56	81,8	113,1	765	485	305	60	245	860	560	355
	B	O	G							W/FOAM	16,39										
7635HL	BE	OE	GE	DE				75		EMPTY	9,4	82,2	106,6	763	399	350	50	300	832	466	369
	B	O	G	D						W/FOAM	11,8										
7641	BE	OE	GE					60		EMPTY	15,02	118,5	153,9	765	485	415	60	355	860	560	460
	B	O	G							W/FOAM	18,87										
7726	BE	OE	GE					60		EMPTY	10,3	70	118	770	580	265	90	175	836	641	304
	B	O	G							W/FOAM	12,6										
7745	BE	OE	GE					60		EMPTY	15,5	144	200	770	580	450	90	360	836	641	489
	B	O	G							W/FOAM	19,8										
7814HL	BE		GE	DE					✓	EMPTY	5,5	25,3	39,6	780	350	145	42	103	846	427	167
	B		G	D						W/FOAM	6,4										
8830HL	BE	OE	GE	DE						EMPTY	6,9	61,78	80,52	880	300	305	45	260	949	368	329
	B	O	G	D						W/FOAM	8,8										
8831HL	BE	OE	GE	DE				75		EMPTY	7,8	61,78	80,52	880	300	305	45	260	963	368	329
	B	O	G	D						W/FOAM	9,7										
9413	BE		GE	DE				60		EMPTY	6,7	27,9	45,3	936	350	135	42	93	987	414	158
	B		G	D						W/FOAM	7,7										
9433	BE	OE	GE	DE				75		EMPTY	10,2	84,9	108	936	350	330	42	288	1009	412	354
	B	O	G	D						W/FOAM	12,7										
10826	BE							60		EMPTY	17	120,6	174	1080	620	260	60	200	1178	725	287
	B									W/FOAM	20,4										
10840	BE		GE				✓	60		EMPTY	19,8	120,6	260	1080	620	400	200	200	1178	718	427
	B		G							W/FOAM	26,3										
11413	BE		GE	DE				60	✓	EMPTY	7,8	33,3	53,7	1136	350	135	42	93	1189	415	159
	B		G	D						W/FOAM	8,8										
13513	BE		GE	DE				60		EMPTY	8,7	39,5	63,7	1350	350	135	42	93	1430	415	159
	B		G	D						W/FOAM	9,95										
13527	BE		GE	DE				60		EMPTY	11,7	97,5	128,5	1350	350	272	42	230	1430	415	296
	B		G	D						W/FOAM	14,9										
14242	BE	OE	GE	DE						EMPTY	20,9	193,26	250,49	1420	420	420	60	360	1495	493	544
	B	O	G	D						W/FOAM	26,4										
14243	BE	OE	GE	DE				75		EMPTY	21,4	193,26	250,49	1420	420	420	60	360	1507	493	544
	B	O	G	D						W/FOAM	26,9										
14249	BE	OE	GE	DE				75		EMPTY	21,3	229,73	292,24	1420	420	488	60	428	1507	493	544
	B	O	G	D						W/FOAM	27,7										
15416	BE		GE	DE				60		EMPTY	11,3	61,6	92,9	1540	377	160	42	118	1629	456	183
	B		G	D						W/FOAM	13,4										

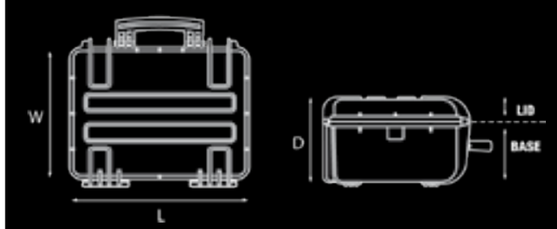

Dimensional tolerance: +/- 1.5%

Nato Stock Numbers (NSN) available on demand.

* Maximum load capacity when content is evenly distributed while maintaining buoyancy level just below the lid closure line.

** For models 4825HL, 5122, 5822, 5823 and 5833 the internal dimensions given are calculated on the deepest bottom area.

Distributed by:

GT LINE srl a socio unico - Via del Lavoro, 9 - Loc. Crespellano
40053 Valsamoggia (Bo) - Italy
Tel. +39 051 65041 - Fax +39 051 734925
www.explorercases.com - sales@explorercases.com

REG. N. 1594-A
UNI EN ISO 9001:2015

Content is not included. The information contained in this catalogue are indicative only. GT Line reserves the right at all times to incorporate modifications in the models described, in accordance with technical or commercial requirements.
All product names, logos and brands are property of their respective owners. Photo credits: PH DARIO BOLOGNA; SVALBARD ISLANDS' 2005 WHITE BEAR - PH MIREILLE DE LA LEZ; SHANNONWILD.COM - SOUTH AFRICA 2014 - PH SHANNON BENSON & RUSSELL OWEN MACLAUGHLIN; DAKAR RALLY – DAKAR PRESS TEAM; I AM EXPEDITION - BORNEO 2014 – PH CHRISTIAN PATRICK RICCI; UPIX Fotografia Ipogea.

CAT. GEN. EXPL. EN - 09/26 -MP.0594 - 500